

The Toshiba UR-800-TA includes a tension arm that can be mounted either side to enable label rewinding from either direction. This guide will show you to correctly assemble the Toshiba UR-800-TA including the tension arm.

DOCUMENT DETAILS

Document version 1.0

Updated August 1, 2014

TECHNICAL SUPPORT

#### How to Attach the Tension Arm


At the front of the rewinder there are two shafts: the top one is for the main rewinder spindle and the lower one is for the tension arm.

#### www.progressive-id.co.uk support@progressive-id.co.uk Tel: 01892 837722






To attach the tension arm, unscrew the large screw on the tension arm shaft.

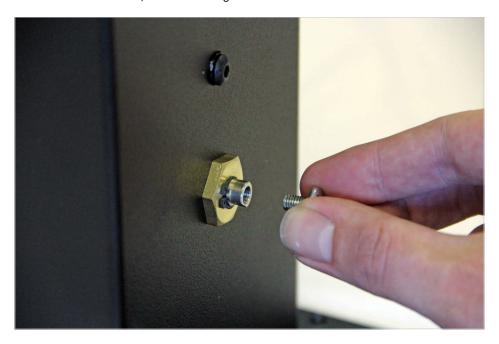


Push the tension arm onto the shaft and make sure that the flat edge aligns with the screw at the end of tension arm.

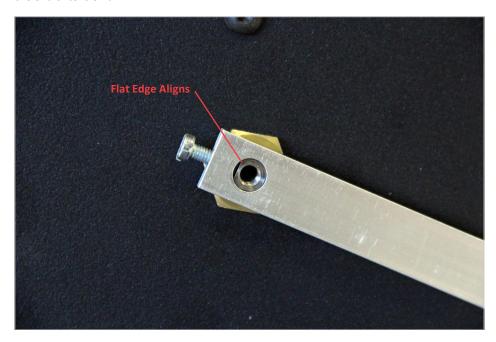



Tighten the screw at the end of the tension arm. Re-insert the main screw and tighten until the arm is held firmly.



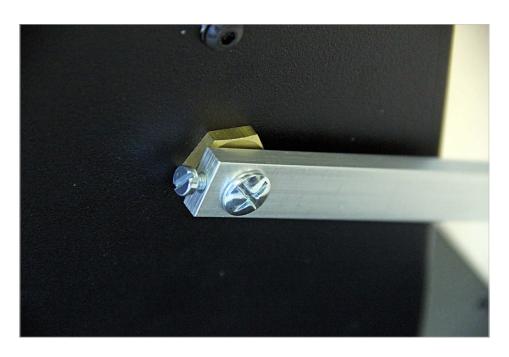




#### How to Attach the Rewind Spindle

Push the rear guide disc onto the end of the main spindle and align the screw with the hole.



Slide the guide disc so the screw is over the hole and tighten the screw to secure in place. Push the main spindle onto the top shaft as far as it will go.

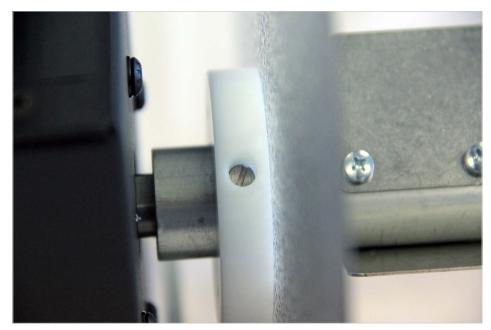

Page 4 of 5



The rewinder is now ready to use.

